




PEORIA, ARIZONA

---

## APPLYING GRAPHICS AND VELCRO



## TOOLS REQUIRED

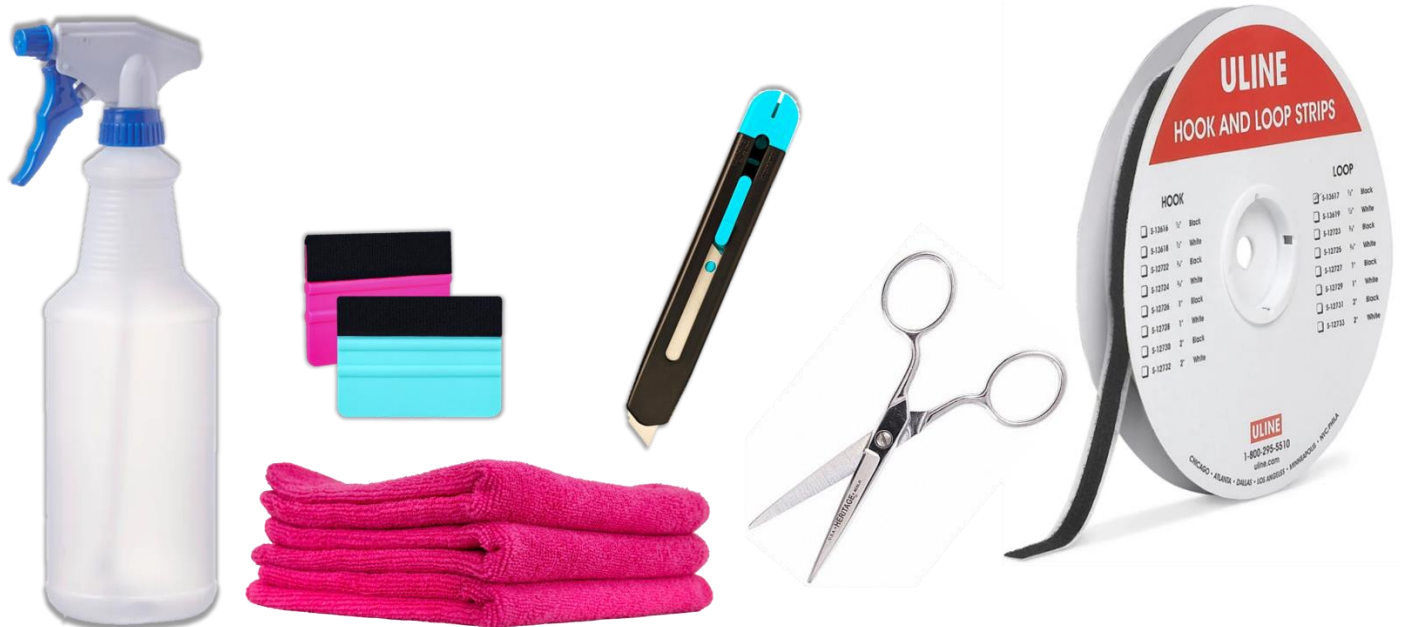

1. Spray Bottle – With mixture of water and a few drops of dish soap
2. Squeegees – Usually provided with the graphics inside cardboard tube
3. Microfiber towels – Lint free
4. Utility Knife / Razor Blade
5. Scissors – To Cut Velcro
6. Velcro (Loop) – Provide by The Mini Jumbotron Company
7. Hard, clean surface that is safe for razor blades such as granite countertop

# HOW TO INSTALL GRAPHICS

*Please read this before continuing:*



- *Graphic Clings and Permanent Decals both install in the same manner with a mixture of soap & water. It is common for your full base graphic to be a Permanent Decal but you will still use the mixture of soap & water to install it. The more soap & water you use the more forgiving the graphic will be during installation.*
- *Make sure your plexi-glass and base are clean and free of any lint, etc.*
- *To install a full graphic to the base, please unplug and remove the recessed lights and remove any protective film.*
- *Save the protective backing of graphics to store Cling Graphics for reuse.*
- *Install graphics and allow them to dry overnight before installing Velcro*
- *Check graphics periodically to ensure no air bubbles have formed. Use squeegee to remove air bubbles.*
- *Additional Velcro, if needed, can be purchased [here](#)*
- *For Decals only, optional black trim shown at end of video can be purchased [here](#)*



CONTINUE TO NEXT PAGES FOR MORE INSTALLATION STEPS

## INSTALLING THE PERMANENT BASE GRAPHIC

- UNPLUG & REMOVE RECESSED LIGHTS PRIOR TO INSTALLING FULL SIZE PERMANENT BASE GRAPHIC.
- REMOVE ANY PROTECTIVE FILM.
- PERMANENT BASE GRAPHIC WILL ALSO INSTALL WITH SOAP & WATER MIXTURE. SPRAY PLENTY OF SOAP & WATER TO KEEP THE PERMANENT GRAPHIC FORGIVING DURING INSTALLATION.

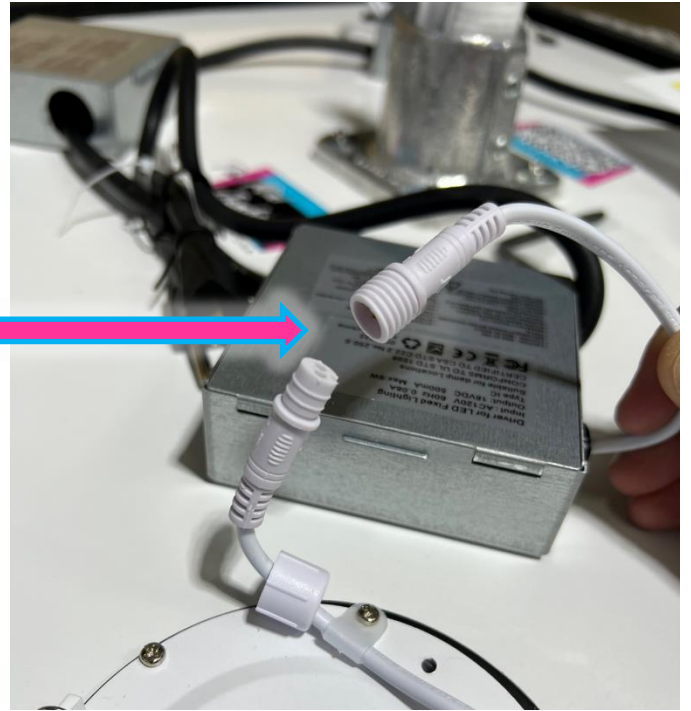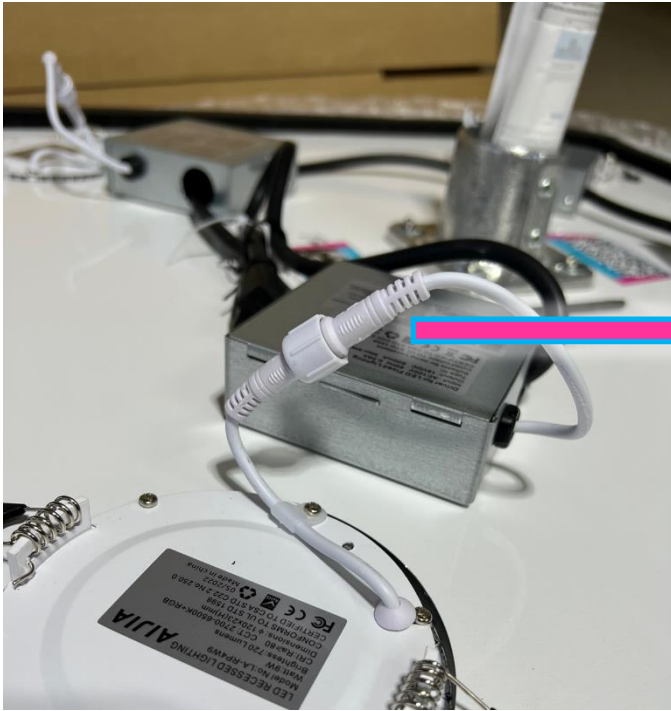

CONTINUE TO NEXT PAGES FOR VELCRO INSTALLATION STEPS

# APPLYING VELCRO TO THE TOPS

After allowing the plexi-glass and graphics to dry overnight...



Place your plexi-glass tops with graphics affixed onto a clean smooth surface



Gently flip it over the tops



Apply Velcro strips to the top and bottom edges. Remove any air bubbles behind the Velcro by making sure Velcro is affixed smoothly and firmly.




Apply Velcro strips to the side edges

# APPLYING VELCRO TO CORNERS

After allowing the graphics to dry overnight, 1) Place your plexi-glass corners with graphics affixed onto a clean smooth surface 2) Gently flip over the corners 3) Affix Velcro as pictured below:

## ***NANOTRON 24", 32", & 43"***

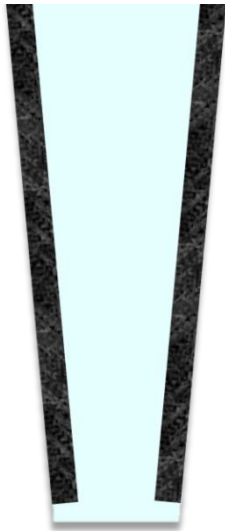

## ***MINITRON 24" & SCORETON 24"***



## ***MICROTRON 24", MACROTRON 32", & MEGATRON 43"***



If you have any questions, please contact us.

[www.Minijumbotron.com](http://www.Minijumbotron.com)